Inwall C100 Cistern Pneumatic actuation • 80mm thick



Slim in-wall cistern
• Suits floor mount pan
• Fits standard wall

This in-wall cistern is part of the in-wall toilet system. The cistern is activated through pneumatic flush buttons.


- Suits floor mount toilet pan.
- 80mm thick, slim design, suits installation in a standard wall (or other).
- Front access to cistern through flush plate.
- Fully insulated by anti-condensation foam to prevent moisture escape.
- Easy to install.
- Innovative design allows the cistern to be serviced through the flush plate.


Order codes

191806	Inwall C100 cistern	Old code: STO-C100

Product details

ACCESS	Front access through flush plate.
WELS	4 star rating 4.5/3 litre water saving flush (Reg 04737).
PAN	Suits floor mount pan.
BUTTONS	Compatible with the full range of flush buttons.
INSTALLATION	Refer to installation instructions for details.
WELS RATING	4 Star 4.5/3L flush. Reg No. L04738. WELS Licence 0296. WM Licence 23345.

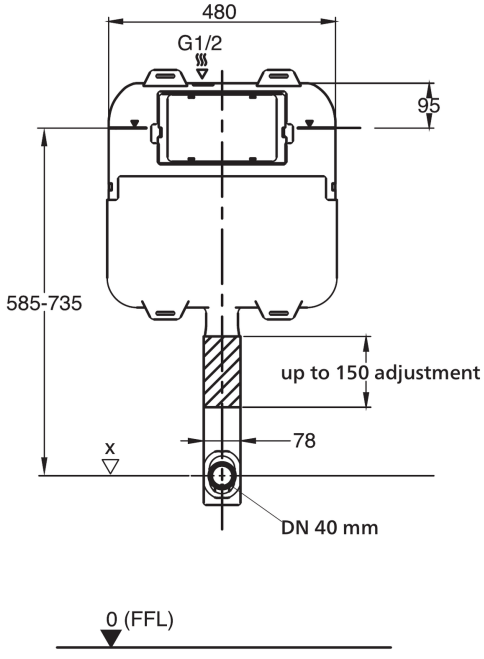

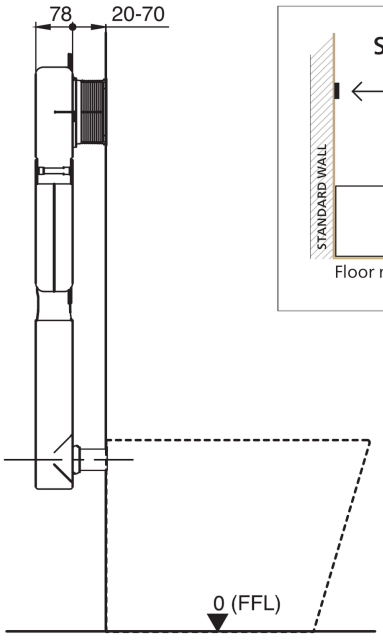

Standard wall – C100 cistern

The C100 cistern can be installed within a standard wall, allowing for a cistern thickness of 80 mm. The flush button plate is placed on the wall above the toilet pan (front access). The cistern can be serviced through the flush plate. The C100 cistern can also be used in a nib wall.

Floor mount pan

WaterMark
WM23345
AS1172

WATER RATING
www.waterrating.gov.au
3.5 litres average flush
4.5L per full flush / 3L per half flush
In accordance with AS/NZS 6400
Licence No. 0296
Swima Pty Ltd

– by –

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129