Inwall C200 Cistern with Frame Pneumatic actuation • 80mm thick



Slim in-wall cistern with frame
• Suits wall hung pan
• Fits standard wall

This in-wall cistern is part of the in-wall toilet system. The cistern is activated through pneumatic flush buttons.


- Suits wall hung toilet pan.
- 80mm thick, slim cistern design for installation in a standard wall (or other).
- Front access through flush plate.
- Fully insulated by anti-condensation foam to prevent moisture escape.
- Powder coated galvanised steel frame for durability.
- Easy to install.
- Innovative design allows the cistern to be serviced through the flush plate.


Order codes


191808	Inwall C200 cistern w frame	Old code: STO-C200

Product details


ACCESS	Front access through flush plate.
FRAME	Powder coated galvanised steel.
PAN	Suits wall hung pan.
BUTTONS	Compatible with the full range of flush buttons.
INSTALLATION	Refer to installation instructions for details.
WELS RATING	4 Star 4.5/3L flush. Reg No. L04737. WELS Licence 0296. WM Licence 23345.

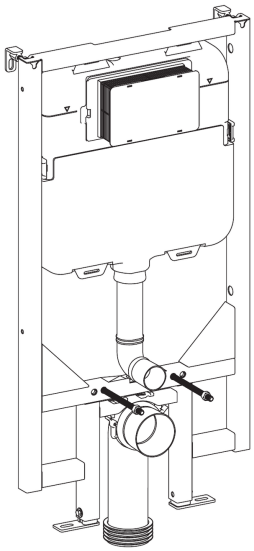

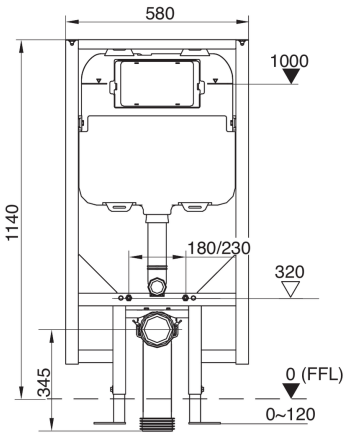

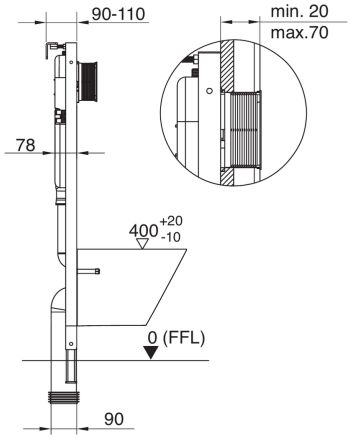

Standard wall – 200 cistern



The C200 cistern can be installed within a standard wall, allowing for a cistern thickness of 80 mm. The flush button plate is placed on the wall above the toilet pan (front access). The cistern can be serviced through the flush plate. The C200 cistern can also be used in a nib wall.

Wall hung pan

WaterMark
WM23345
AS1172

The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
3.5 litres average flush
4.5L per full flush / 3L per half flush
In accordance with AS/NZS 6400
Licence No. 0296
Swima Pty Ltd

– by –

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129