Inwall M101 Cistern Mechanical actuation • 130mm thick



Inwall cistern with mechanical actuation

• 130mm thick design to suit nib wall
• Suits floor mount toilet

The cistern is activated through mechanical flush buttons.


- Suits floor mount toilet pan.
- Undercounter cistern designed for installation in a nib wall.
- Front access or top access to cistern through flush plate.
- Fully insulated by anti-condensation foam to prevent moisture escape.
- Easy to install.
- Innovative design allows the cistern to be serviced through the flush plate.


Order codes


192681	Inwall M101 Cistern – Mechanical Actuation

Product details

ACCESS	Front access or top access through flush plate.
WELS	4 star rating 4.5/3 litre water saving flush.
PAN	Suits floor mount toilet pan.
BUTTONS	Compatible with mechanical flush buttons.
INSTALLATION	Refer to installation instructions.
WELS RATING	4 Star 4.5/3L flush. Reg No. L07969. WELS Licence 0296. WM Licence 23345.

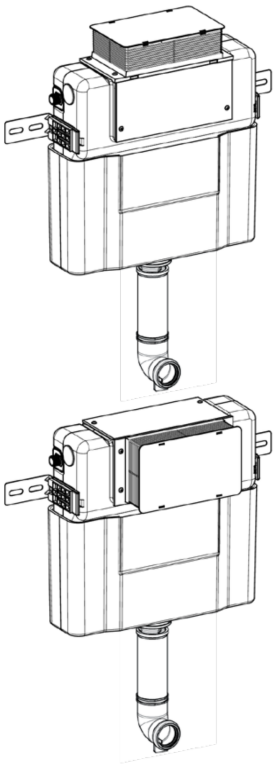


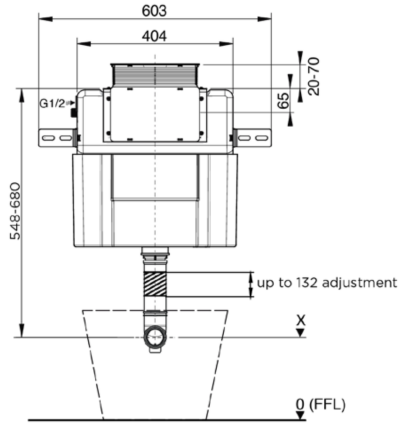

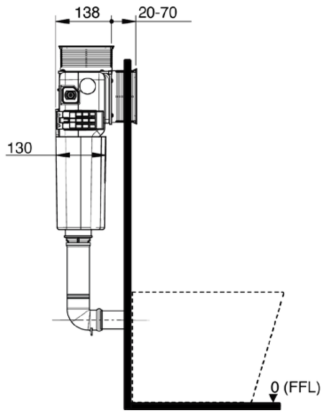

Nib wall – 101 cistern

The 101 cistern can be installed within a nib wall, allowing for a cistern thickness of 130 mm. The flush button plate is placed either on the wall above the toilet pan (for front access) OR on the top of the nib wall (for top access).



WaterMark
WM23345
AS1172

The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
3.3 litres average flush
4.5L per full flush / 3L per half flush
In accordance with AS/NZS 6400
Licence No. 0296
Swima Pty Ltd

– by –

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129