


Inwall M200 Cistern with Frame Mechanical actuation • 80mm thick



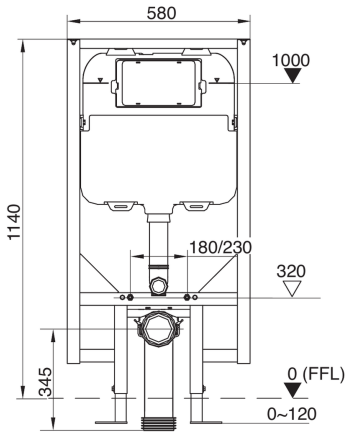

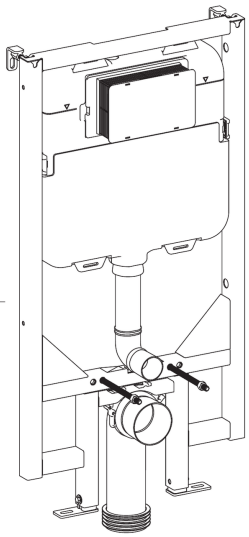

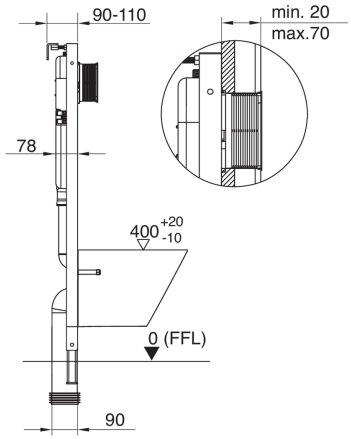

In-wall cistern w frame – mechanical

• Slim 80mm thick design to suit standard wall

• Suits wall hung toilet

The cistern is activated through mechanical flush buttons.

- Suits wall hung toilet pan.
- 80mm thick, slim cistern design for installation in a standard wall.
- Front access through flush plate.
- Fully insulated by anti-condensation foam to prevent moisture escape.
- Powder coated galvanised steel frame for durability.
- Easy to install.
- Innovative design allows the cistern to be serviced through the flush plate.


Order codes

192682	Inwall M200 Cistern with Frame – Mechanical Actuation

Product details

ACCESS	Front access through flush plate.
FRAME	Powder coated galvanised steel.
PAN	Suits wall hung pan.
BUTTONS	Compatible with mechanical flush buttons.
INSTALLATION	Refer to installation instructions for details.
WELS RATING	4 Star 4.5/3L flush. Reg No. L07967. WELS Licence 0296. WM Licence 23345.

Standard wall – 200 cistern



The C200 cistern can be installed within a standard wall, allowing for a cistern thickness of 80 mm. The flush button plate is placed on the wall above the toilet pan (front access). The cistern can be serviced through the flush plate. The C200 cistern can also be used in a nib wall.

Wall hung pan

WaterMark
WM23345
AS1172

The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
3.4 litres average flush
4.5L per full flush / 3L per half flush
In accordance with AS/NZS 6400
Licence No. 0296
Swima Pty Ltd

– by –

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129