



SPECIFICATIONS

BLOOM FLOOR SPOUT


Adp

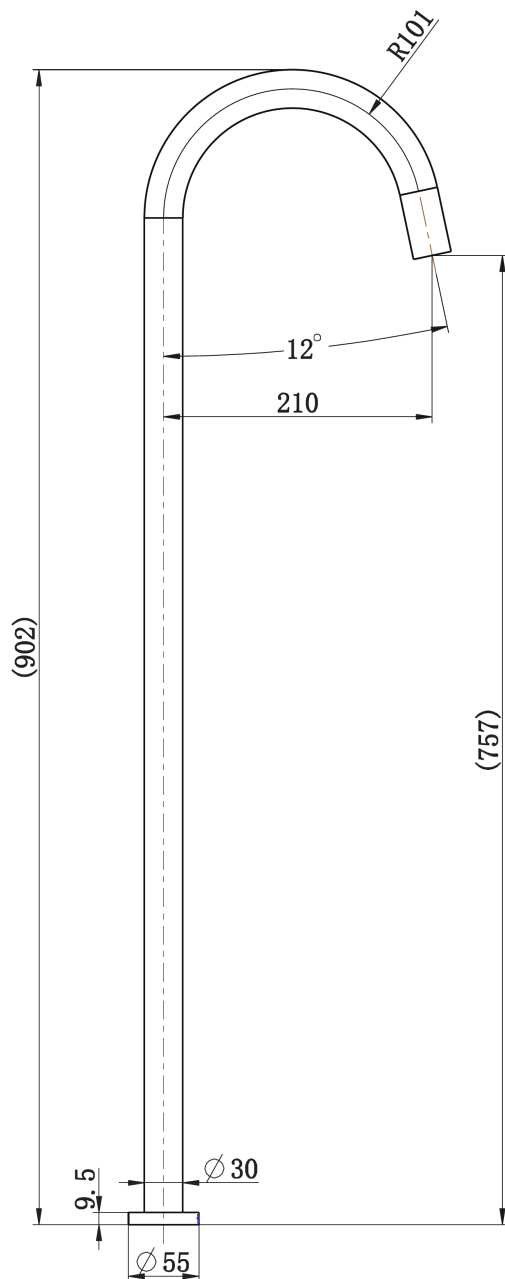


1. Cut a channel and recess pipe in the floor, make sure the G1/2" connector exceeds floor of 10-15mm. (Including tile's thickness.)

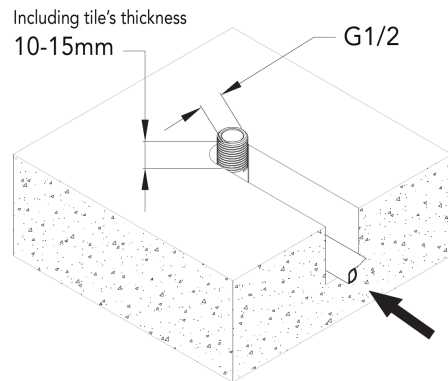

2. Tile the floor.



3. Fasten the spout to the G1/2 connector tightening clock-wise until firm and facing bath tub. Use plumber's tape to ensure seal.

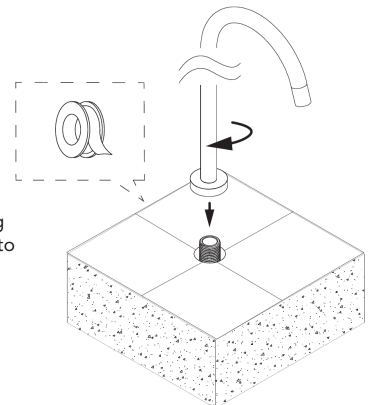

4. Turn on water supply and test for leaks.

JTAPFSBLMCP
JTAPFSBLMBK
JTAPFSBLMNK
JTAPFSBLMBB



Water supply requirements

Not recommended for gravity fed water systems or water tanks.

Working Pressure: 350 – 500kpa (including cold and hot water pressure)
Maximum Pressure: 73psi / 500kpa
Temperature Rating: 5°C - 65°C (must not exceed 70°C)

Installation should comply with Australian standard AS/NZS 3500 or relevant local authority requirements.

— brought —

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129