fienza

SPECIFICATIONS

Alix

BACK-TO-WALL TOILET SUITE

WITH GREY SEAT


Features

- Can be installed to comply with Ambulant AS1428.1
- Tornado rimless ultra quiet flush
- Extra height pan
- Short projection from wall for tight spaces
- Gloss white finish
- Large, easy-push chrome flush buttons
- Concealed pan for easy cleaning
- Gloss grey UF quick release, soft close seat
- High quality, R&T or Geberit flush systems
- Top or bottom inlets:
  - Left top inlet
  - Left or right bottom inlet
- Available as P-Trap or S-Trap
- WELS 4 Star rated, 4.5L/3L (3.3L average flush)





AS 1428.1 AMBULANT COMPLIANT

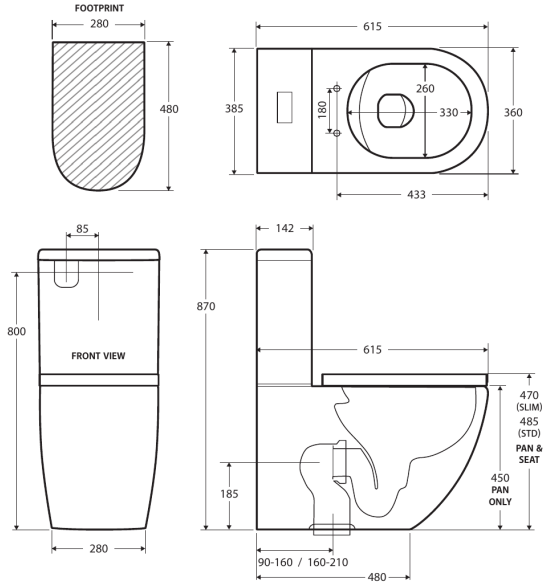

Available in

P-Trap R&T System **K011GP**	S-Trap 90-160 R&T System **K011GA**	S-Trap 160-210 R&T System **K011GB**
P-Trap Geberit System **K011GGEP**	S-Trap 90-160 Geberit System **K011GGEA**	S-Trap 160-210 Geberit System **K011GGEB**

Cleaning & Care

- The toilet seat may be removed for cleaning - depress the quick release buttons and lift up.
- Clean only with a soft cloth or sponge using warm water and mild soap or detergent. Do not use any abrasive cleaning materials.
- Do not use any solvents or corrosive liquids.
- Note that use of clip-on deodorisers will affect flushing performance on rimless suites.

WaterMark

WATER RATING www.waterrating.gov.au 3.3 litres average flush 4.5 L per full flush / 3 L per half flush In accordance with AS/NZS 6400 Licence No. 0252 Fienza

We aim to ensure that specifications are correct at the time of publication. All measurements are shown in millimetres. For ceramic products, please allow +/- 10 mm tolerance for manufacturing variance. Always use measurements of actual product received for final specification as the technical drawing may contain differences. Due to printing limitations, physical colour may vary from the image shown. Fienza reserves the right to make modifications without prior notice.

– brought by –

elenni Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129