MS16

SWIVEL BATH SPOUT

meir®




FEATURES

- Flow rate 20 L/m at 3 bar pressure.
- Swivel range from is wall to wall.
- European bath aerator.
- Solid brass construction.
- 68mm long 1/2" threaded adapter included


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


SPECIFICATIONS

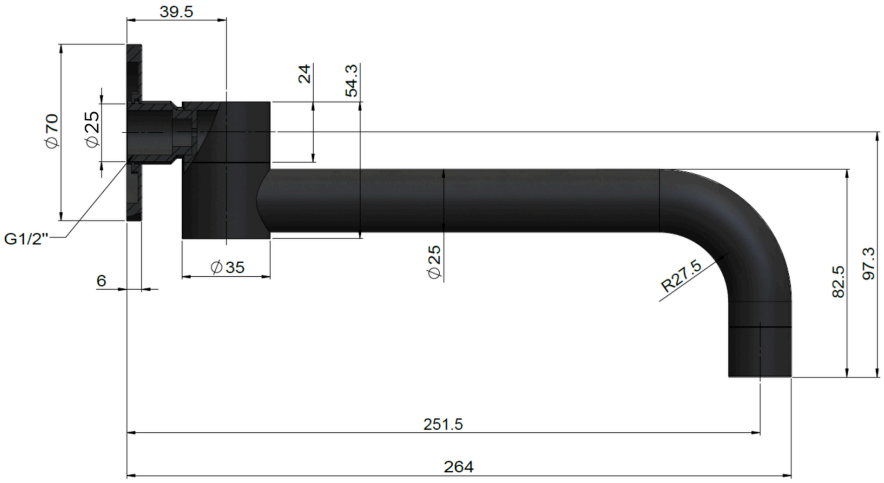

FLOW RATE GRAPH

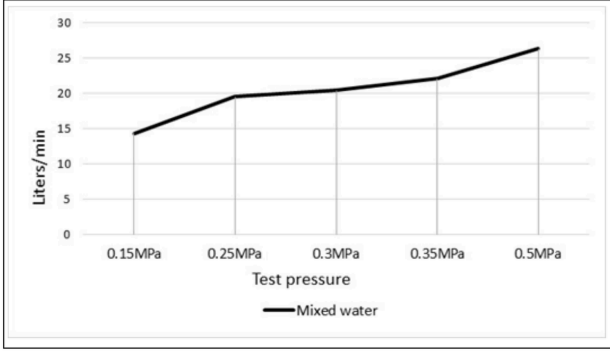

EXPLODED VIEW

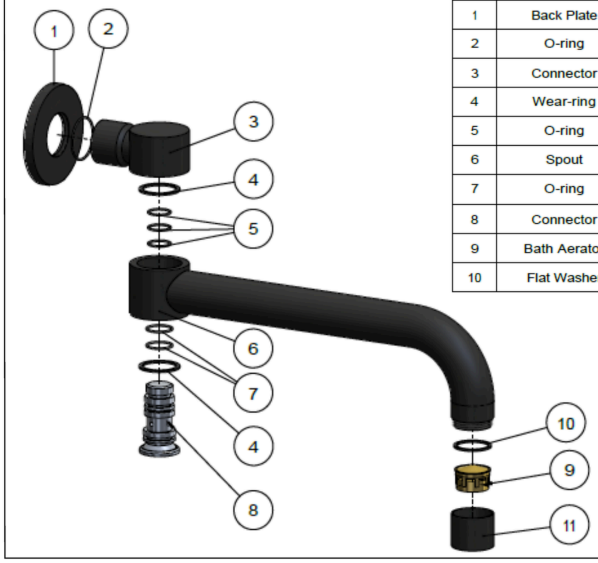

No.	Part Name	Qty
1	Back Plate	1
2	O-ring	1
3	Connector	1
4	Wear-ring	2
5	O-ring	3
6	Spout	1
7	O-ring	2
8	Connector	1
9	Bath Aerator	1
10	Flat Washer	1

CREDENTIALS

- Watermark AS/NZS3718WMKA25013

– brought by –

elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129