MW06
WALL TOP ASSEMBLY



meir®


FEATURES

- 1/4 turn 85mm ceramic spindle
- Flow rate 20L p/min at 3 bar pressure.
- Solid brass construction
- Required Parts MSABR00/MP13
- Box Weight 0.6Kg


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


SPECIFICATIONS

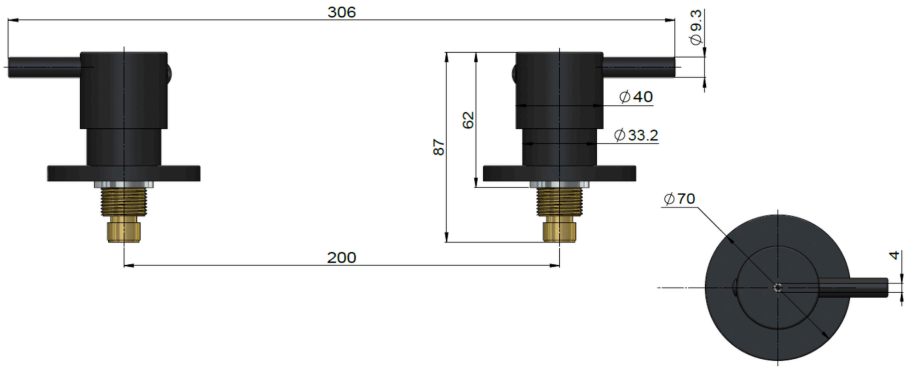

TOLERANCE

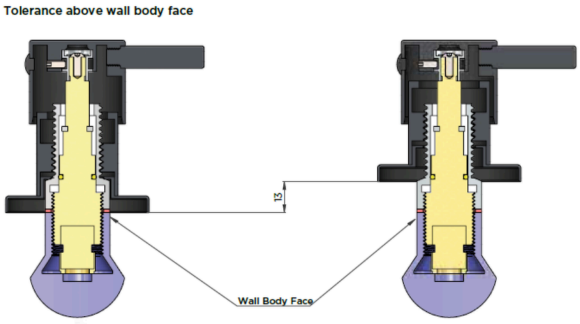


FLOW RATE GRAPH

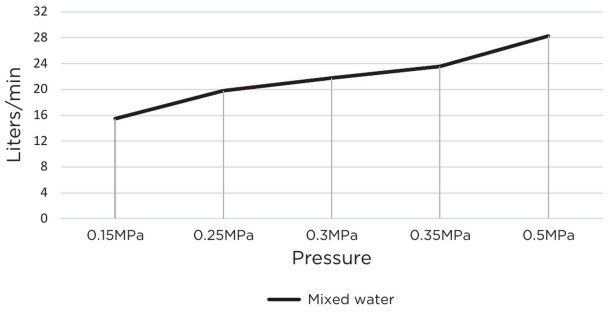

CREDENTIALS

- Watermark AS/NZS 3718 WMKA 20374

EXPLODED VIEW

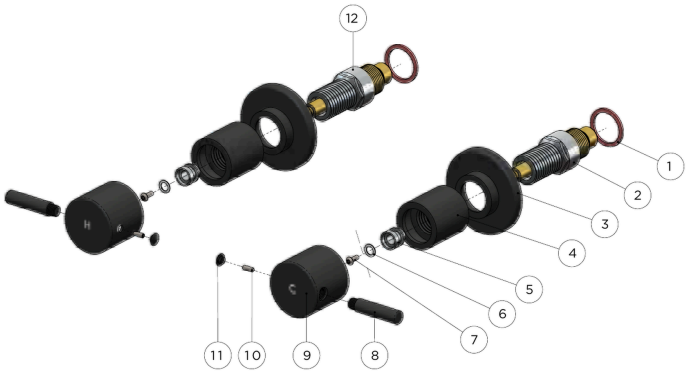

1. Fibre washer
2. Cold cartridge
3. Back plate
4. Nut
5. Connector
6. Washer
7. Screw
8. Handle lever
9. Handle
10. Screw
11. Decor knob
12. Hot cartridge

– by –
elenni
Kitchen & Bathroom Collection

www.elenni.com.au
customerservice@elenni.com.au
Contact us 07 32099644
1 Bryants Rd, Loganholme QLD 4129