




LED MIRROR

INSTALLATION MANUAL

AN50, AR50D, GAR70D, GGAR60, G4590D, G60100D, GG45120D, GGG60,
IN4590, IN60100, M75D, M75DB, M90D, M90DB, M120D, M120DB, M150D,
M150DB, M180D, M180DB, ON45, RN9060, RN12075, S60, S60D, S60DB,
S80, S80D, S80DB, SN60, SN80

 **CAUTION - This product must be installed by a licensed electrician.**

It is the responsibility of the installer to ensure the product is correctly installed, as per this instruction manual.

Please read this instruction manual & warnings carefully and refer back during installation to ensure the product is fitted safely and that it retains its high quality.

BEFORE INSTALLATION

Please check your goods carefully and ensure all supplied parts are removed from the box prior to disposal.

If your LED Mirror is damaged, incorrect or faulty, **DO NOT** proceed with installation and get in touch with your store of purchase immediately. No claims for damages or defects will be accepted after this product is installed.

For full warranty terms please visit remer.com.au/warranty


FOR SAFE USE:

- Our mirrors are RCM certified to Australian standards, so are recognised as electrical appliances. Additional fixings cannot be added, as this will void certification and warranty, and may render the product unsafe.
- Always switch off the electrical supply to the product at the mains during installation and maintenance.
- Remer mirrors come with a plug, with the preferred installation requiring a recessed plug base or junction box located behind the mirror.
- We recommend this product be installed by two people.
- Refer to product IP rating for compliant installation of this product, in line with IEEE regulations. Visit the resources page on our website for specification sheets, www.remer.com.au/resources
- Take suitable precautions when handling products.
- Do not install and/or use if product is broken or unsafe.
- This product is not suitable for use in saunas, steam rooms or shower cubicles.

PARTS IN BOX:

1 x LED Mirror

2 x Brackets





3 - 4 x Spacers (Bluetooth selected models only - excluding Miro)



This installation manual applies to all LED Mirrors ex Eclipse & Kara.
Mirror shape for illustrative purposes only.

HANDLING TIPS:


- **Do not place Remer mirrors on hard surfaces.**
- **Always lift with two or more people.**
- Measure and install bracket on the wall using the appropriate wall fixings for your wall type.

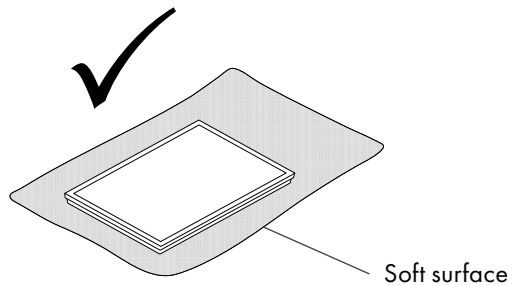

INSTALLATION


All Remer LED products require an isolation switch as set out in the Australian Electrical Safety Standards with appropriate circuit protection.

1.

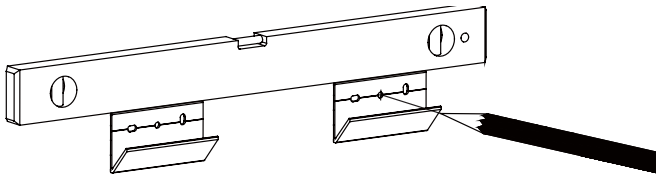


2. Install the bracket vertical hole first followed by horizontal hole and middle.

Vertical to adjust the height of bracket. Horizontal to ensure the bracket levels.
Middle to enhance the installation.




3.




Bluetooth models only excluding Miro:

Remove screw caps and screw on the spacer. Please note that the range of the adjustment spacer should not exceed 40mm from the back of the mirror.

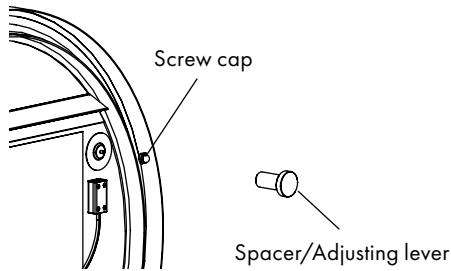

*NOTE: If you plan to have a non-Bluetooth model next to a Bluetooth model, use spacers on both mirrors to ensure an even installation.

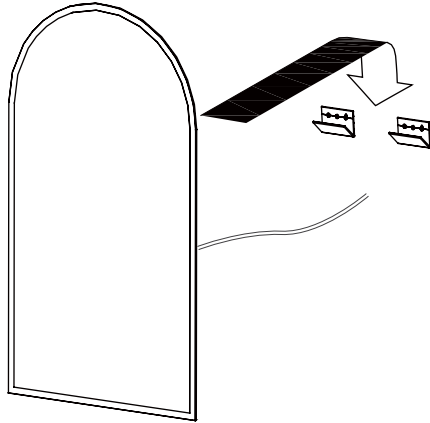4.

VIEW OUR USER & MAINTENANCE GUIDE:



REMER PTY LED RESERVES THE RIGHT TO MAKE ANY CHANGES IN PRODUCT CHARACTERISTICS, PACKAGING OR AVAILABILITY AT ANY TIME WITHOUT NOTICE. PLEASE VISIT OUR WEBSITE OR CONTACT OUR MELBOURNE BASED CUSTOMER SERVICE TEAM FOR THE LATEST INFORMATION.

REMER

13-15 Edison Road, Dandenong South, VIC 3175

03 9706 6663

info@remer.com.au

www.remer.com.au